

- Completely enclosed body
- Streamlined centerline closure
- Tight shut-off even on trapped solids
- Positive opening tabs standard on all sleeves
- Non-rising hand wheel with position indicator
- Face-to-face values equal to industry standards

The Series 2000 Pinch Valve is a completely enclosed, manually operated valve. Its reliable, maintenance-free design is perfectly suited for tough slurries, abrasives, and corrosive chemical applications.

The enclosed body offers protection against moving parts and in the event of sleeve failure offers additional safety.


The heart of the Series 2000 Pinch Valve is a long-lasting, flexible rubber sleeve, available in a wide variety of elastomers suitable for any application. With its excellent control characteristics, the Series 2000 can be used as a manual throttling control valve. Reduced port, funnel port or double wall sleeves are available for these applications.



Typical Applications


Waste and Water Treatment - Mine Slurries -
Chemicals - Cement - Pulp and Paper

The body of the Series 2000 Valve is constructed of ductile iron, but lightweight aluminum and corrosion resistant stainless steel are also available. 12" and larger body sizes are of fabricated steel design.

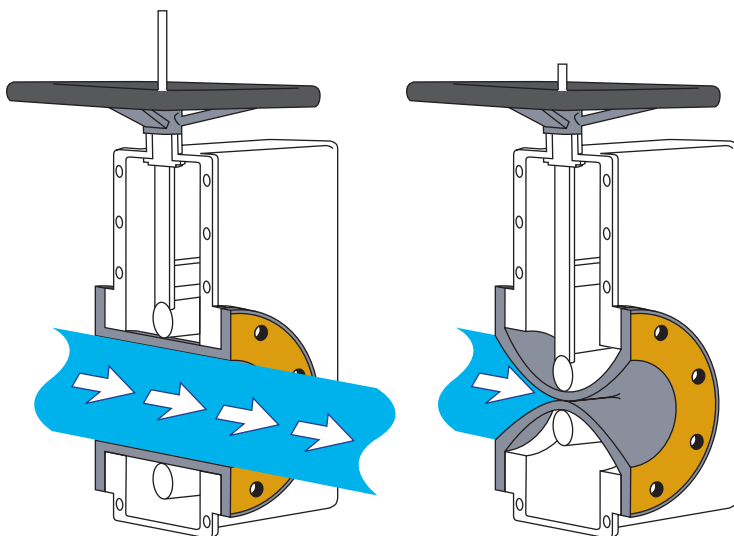

Series 2000 Pinch Valves provide excellent flow control compared to other valves due to their simple yet effective design. In addition, the sleeve is the only part of the valve exposed to the line process, eliminating corrosion of the more expensive mechanical components.

During operation, two pinch bars squeeze the flexible rubber sleeve, allowing the Series 2000 Valve to achieve a variable and stable flow rate. Fully open, the valve allows for full, straight through flow, eliminating areas where solids could build up and impair operation. Fully closed, the Series 2000 Valve maintains complete closure, with no leakage in either direction.

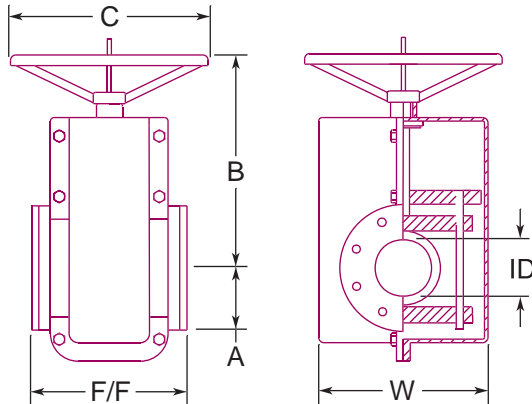

For engineering specifications or when placing your order, please provide the following information:

Flange Drilling ANSI 125 ANSI 300
 PN 6 PN 10
 PN 16 BS 10
 Other

ID ¹	1	1-1/2	2	2-1/2	3	4	5	6	8	10	12	14	16	18	20	24
F/F¹	5-1/2	6-1/2	7	7-1/2	8	9	10	10-1/2	16	20	24	28	32	36	40	48
W¹	5-1/4	5-3/8	7-1/8	9-3/4	8-1/4	9-1/2	12-1/2	13	18-1/2	22-1/2	25	29	33	35	39	50-1/2
A¹	3	4	4-1/2	5	5	5-1/2	6-1/2	8	10	11	12	14	15	16	17	23
B¹	7-1/2	7-1/2	9-3/8	9-3/8	10-1/2	12	16	18	22	24	25	29	32	35	37	43
C¹	4	4	8	8	8	12	11	18	22	22	22	30	30	36	36	48
Work Press.²	150	150	150	150	150	150	125	125	75	75	75	50	50	50	50	50
Weight³ (est.)	12	25	34	43	52	123	200	300	345	410	472	588	930	1150	1300	1510

1 - inches 2 - psi 3 - pounds

Dimensions can be revised to suit custom specifications.

Elastomer Selection Guide

Ethylene Propylene Rubber (EPDM)

Most effective for applications involving water, steam or diluted acids.

Viton™ (FKM)

Resists solvents, halogenated hydrocarbons, oxygen, weather, ozone, oils and chemicals.

Buna N (NBR)

Resistant to kerosene, moderate chemicals, fats, oils, grease and many hydrocarbons.

Natural Rubber (NR)

Good abrasion resistance, tensile strength and resiliency. Also suitable when dealing with organic acids, alcohols, ketones and most moderate chemicals.

Hypalon™ (CSM)

Resists strong acids and bases, ozone, weathering, heat and oxidizing chemicals.

Butyl (CIIR)

Good resistance to animal and vegetable fats, strong and oxidizing chemicals, oils, heat and greases.

Neoprene (CR)

Generally resistant to oil and grease, moderate chemicals, fats, many hydrocarbons and ozone. Resistant to barnacle growth.

Teflon™ (AFMU)

Excellent resistance to chemicals. Fair abrasion resistance.

Options

Flange Drilling - ANSI, Metric, or custom drilling classes available.

Chainwheel Controls - For valves that are mounted out of reach.


Bevel Gear - Suggested for high pressure applications or for valve's where diameter is at least 6" and pressure is 75 psi or above.

Stem Extensions - Available for hard to reach or buried service valves.


When placing your order, please indicate sleeve material by appending elastomer abbreviation (CR, NR, etc) to the model name.
IE: Series 2000-CR

Replacement Sleeves Styles for the Series 2000 Valve


Reduced Port Sleeve




Standard Sleeve

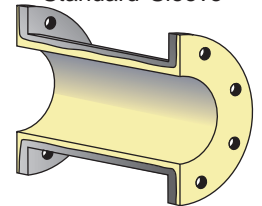

Funnel Sleeve



Double Wall Sleeve

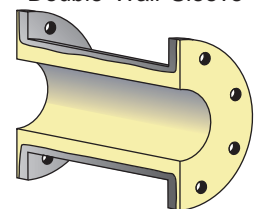

WARRANTY

All EVR products are guaranteed for one full year against defects resulting from faulty workmanship or materials. If any such product is found to be defective by reason of faulty workmanship or materials, upon written notice and return of the product, the defective product will be replaced by us free of charge, including the shipping charges for the replacement product. Claims for labour costs and other expenses required to replace such defective product, or to repair damage resulting from the use thereof will not be allowed by us. Our liability is limited to the price paid for the defective product. EVR Products shall not be bound by any warranty other than the above set forth unless such warranty shall be in writing. This literature is published in good faith and is believed to be reliable, however, EVR Products does not represent and/or warrant in any manner the above information and suggestions contained in this brochure. Data presented is the result of laboratory tests and field experience.

Distributed by:

ELASTO VALVE RUBBER PRODUCTS INC.

1691 Pioneer Road, Sudbury,
 Ontario Canada P3G 1B2
 Tel. (705)523-2026 - Fax. (705)523-2033
 Toll Free 1-800-461-6331 (N.A.)
 Website: www.evrproducts.com
 E-mail: sales@evrproducts.com

ISO 9001 Certified

