


The Series QC features quick connect clamp fittings, which allow for rapid removal of the valve for maintenance. This valve is widely used as a food-grade valve due to its easy removal for frequent inspection and cleaning.

The body of the Series QC Petite Pinch Valve typically consists of stainless steel and aluminum, with highly polished finishes. The end connections are normally supplied as Triclamp fittings.

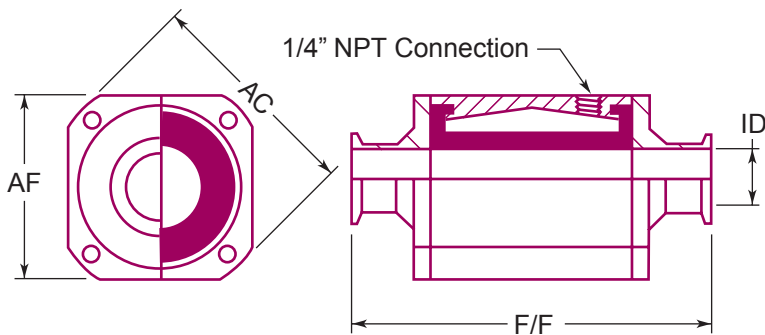

Size	ID	AC	AF	F/F	Work Pressure
03	1/2	2-1/2	2-1/8	5-1/2	60
04	3/4	2-3/4	2-1/4	6-1/2	60
05	1	3	2-1/2	7	60
07	1-1/2	4-1/2	3-3/4	8	50
08	2	5	4	10	50
09	3	6-1/4	5	12	25
10	4	8-1/2	7	14	25

# TYPE 'TU'



Series TU valves feature all plastic construction with double true union ends for simple and quick field service. When the union nuts are backed off, the valve may be removed for servicing without disturbing the adjacent piping.

The Series TU valves are widely used in mineral processing, where the severe service requires frequent inspection and maintenance of equipment.

Size	ID	OD	F/F	C NPT	Work Press.
01	1/4	2-1/4	4	1/4	60
02	3/8	2-5/8	4-1/2	3/8	60
03	1/2	2-5/8	4-1/2	1/2	60
04	3/4	3	5-1/4	3/4	60
05	1	3-9/16	6-1/4	1	60
06	1-1/4	4-3/4	8-3/8	1-1/4	50
07	1-1/2	4-3/4	8-3/8	1-1/2	50
08	2	6	8-3/4	2	50
09	3	6-5/8	9-1/2	3	25

